




### 特點

1. 去除空氣管路中水分
2. 多種型式可供選擇
3. 高過濾精度可去除雜物

### 標準型式表

型 式	接管口徑	附屬品 / 配件
UAM□250	1/4", 3/8"	托架 壓力錶
UAM□350	3/8", 1/2", 3/4"	
UAM□450	1/2", 3/4", 1"	
UAM□650	1", 1½"	








### 記號



### 規格


型 式	UAM□250		UAM□350			UAM□450			UAM□650	
接管口徑	1/4"	3/8"	3/8"	1/2"	3/4"	1/2"	3/4"	1"	1"	1½"
使用流體	空 氣									
額定流量 L/min(ANR)	1600	1600	1600	2500	3000	2500	3500	6000	8000	12000
使用壓力範圍	0.2~1.0MPa(2~10kgf/cm <sup>2</sup> )									
最大使用壓力	1.5MPa(15kgf/cm <sup>2</sup> )									
使用溫度	5°C~60°C									
重量(Kg)	0.84		0.84			1.62			4.3	

### 表示方法


U	AM	G	250	3	D	G	A																																		
螺牙種類	空氣過濾器	過濾精度	型式	接管口徑	附屬品	壓力錶	配件類型 (選購)																																		
U    RC(PT)		<table><tr><td>G</td><td>水分除去率 99%</td></tr><tr><td>F</td><td>過濾精度 3μm</td></tr><tr><td>M</td><td>過濾精度 0.3μm</td></tr><tr><td>D</td><td>過濾精度 0.01μm</td></tr></table>	G	水分除去率 99%	F	過濾精度 3μm	M	過濾精度 0.3μm	D	過濾精度 0.01μm	<table><tr><td>250</td></tr><tr><td>350</td></tr><tr><td>450</td></tr><tr><td>650</td></tr></table>	250	350	450	650	<table><tr><td>2</td><td>1/4"</td></tr><tr><td>3</td><td>3/8"</td></tr><tr><td>4</td><td>1/2"</td></tr><tr><td>6</td><td>3/4"</td></tr><tr><td>8</td><td>1"</td></tr><tr><td>9</td><td>1½"</td></tr></table>	2	1/4"	3	3/8"	4	1/2"	6	3/4"	8	1"	9	1½"	<table><tr><td>D</td><td>自動排水</td></tr></table>	D	自動排水	<table><tr><td>空</td><td>不附壓力錶</td></tr><tr><td>G</td><td>圓形壓力錶 </td></tr></table>	空	不附壓力錶	G	圓形壓力錶 	<table><tr><td>空</td><td>不附托架</td></tr><tr><td>A</td><td>托架 </td></tr></table>	空	不附托架	A	托架 
G	水分除去率 99%																																								
F	過濾精度 3μm																																								
M	過濾精度 0.3μm																																								
D	過濾精度 0.01μm																																								
250																																									
350																																									
450																																									
650																																									
2	1/4"																																								
3	3/8"																																								
4	1/2"																																								
6	3/4"																																								
8	1"																																								
9	1½"																																								
D	自動排水																																								
空	不附壓力錶																																								
G	圓形壓力錶 																																								
空	不附托架																																								
A	托架 																																								

流量特性表


UAMG(F)-250-D




UAMG(F)-350-D




UAMG(F)-450-D




UAMG(F)-650-D




UAMM(D)-250-D




UAMM(D)-350-D




UAMM(D)-450-D



UAMM(D)-650-D



內部構造圖

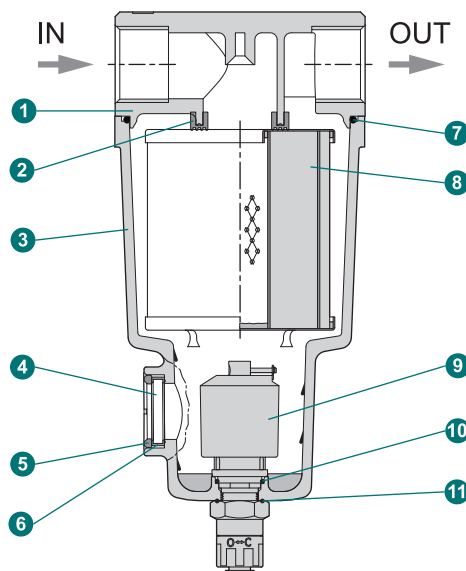


零件表

編號	名稱	材質	數量
①	本體	鋁合金	1
②	止漏油封	NBR	1
③	過濾杯	鋁合金	1
④	視窗玻璃片	強化玻璃	1
⑤	視窗固定環	鐵	1
⑥	視窗油封	NBR	1

編號	名稱	材質	數量
⑦	O 型環	NBR	1
⑧	濾心	-	1
⑨	自動排水器	-	1
⑩	O 型環	NBR	1
⑪	O 型環	NBR	1

## 外型尺寸圖


### ●UAM□

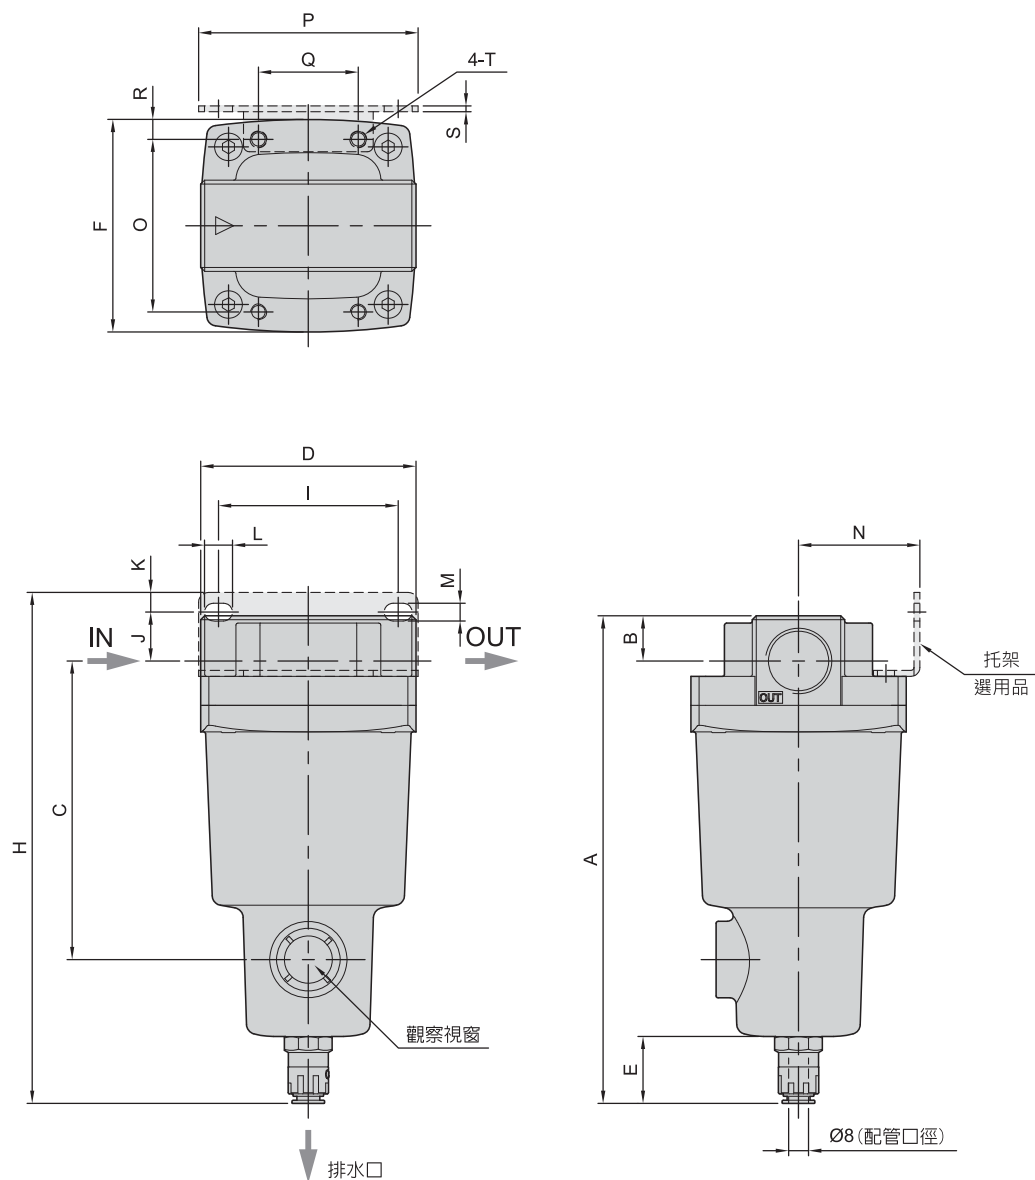

型 式	接管口徑	A	B	C	D	E	F	托架配合尺寸												
								H	I	J	K	L	M	N	O	P	Q	R	S	T
UAM□250	1/4 • 3/8	172	14	113	76	34	76	190	66	24	8	10	6	40	66	80	28	5	2	M6x1.0P
UAM□350	3/8 • 1/2 • 3/4	221	17	133	90	34	90	231	80	19	8	14	7	50	80	100	34	5	2.3	M6x1.0P
UAM□450	1/2 • 3/4 • 1	248	23	152	108	34	108	260	90	25	10	14	9	55	88	110	50	10	3	M8x1.25P
UAM□650	1 • 1½	354	32	241	160	34	160	378	150	40	15	20	11	85	136	180	76	12	4.5	M10x1.5P

外型尺寸圖

●UAM□壓力錶型

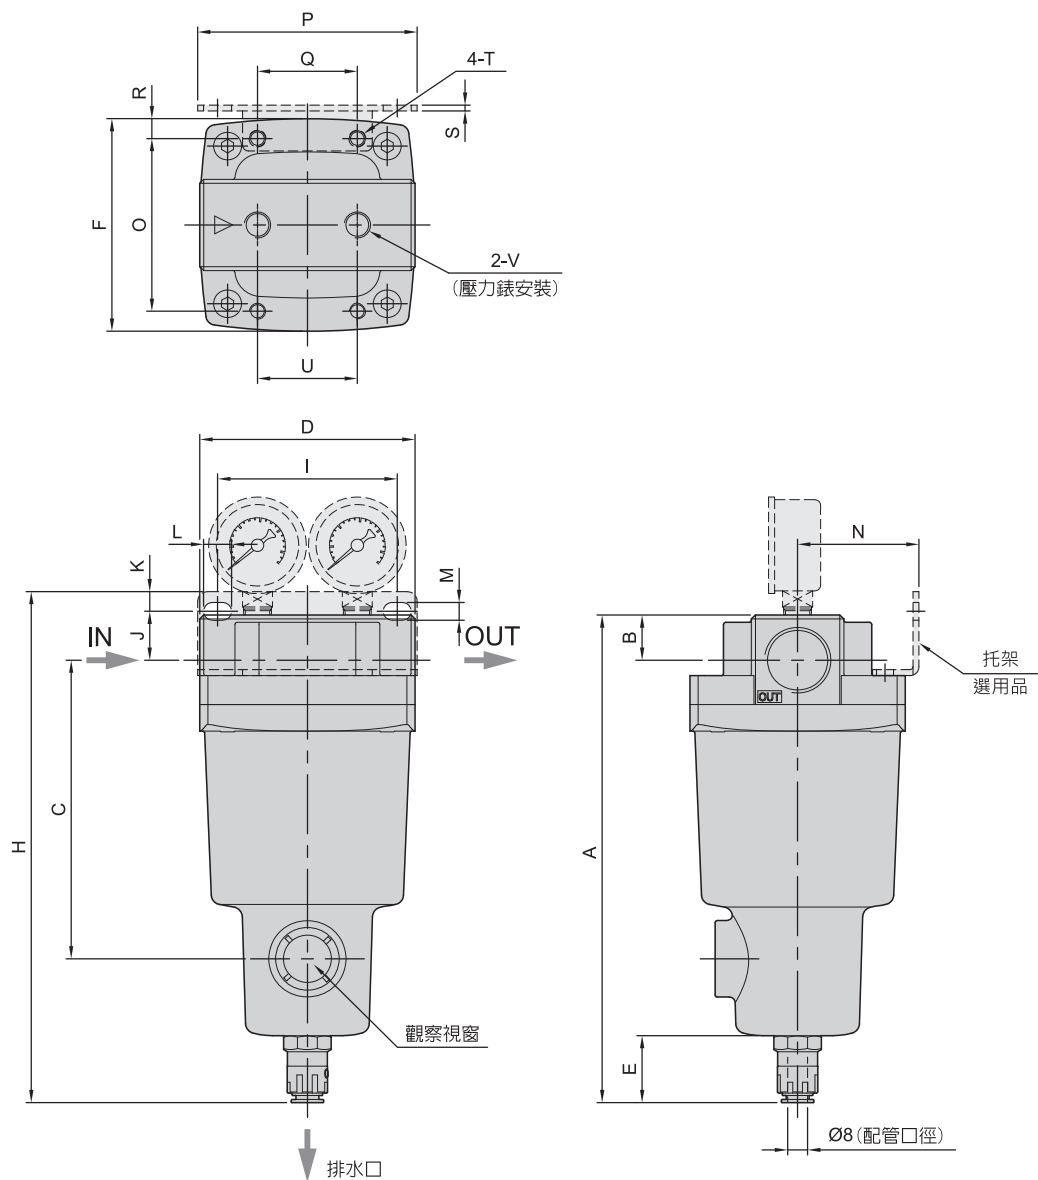

型式	接管口徑	A	B	C	D	E	F	托架配合尺寸												U	V	
								H	I	J	K	L	M	N	O	P	Q	R	S			T
UAM□250	1/4 • 3/8	172	14	113	76	34	76	190	66	24	8	10	6	40	66	80	28	5	2	M6x1.0p	45	Rc 1/8
UAM□350	3/8 • 1/2 • 3/4	221	17	133	90	34	90	231	80	19	8	14	7	50	80	100	34	5	2.3	M6x1.0p	45	Rc 1/8
UAM□450	1/2 • 3/4 • 1	248	23	152	108	34	108	260	90	25	10	14	9	55	88	110	50	10	3	M8x1.25p	50	Rc 1/8
UAM□650	1 • 1½	354	32	241	160	34	160	378	150	40	15	20	11	85	136	180	76	12	4.5	M10x1.5p	70	Rc 1/4